



MINITEMP[®]FS

Portable Food Safety Infrared Thermometer

Noncontact Temperature Measurement

The MINI TEMP[®]FS IR thermometer— specifically designed for Food Service applications

MiniTempFS is a fast and effective screening tool specifically designed and calibrated to meet Food Service Industry accuracy requirements. This handy thermometer reads surface temperature

instantly, making it convenient to take readings more frequently. As a scanning tool, MiniTempFS quickly identifies potential critical temperature problem areas. Using a MiniTempFS—plus a probe thermometer—ensures safer food handling from the receiving dock to table, and all steps in between.

The MiniTempFS can be used to measure temperatures of food products such as soups and beverages; products in hot or cold serving trays; and to assure high quality results by reaching ideal temperatures for cooking, serving or storage.

The MiniTempFS is equipped with a Laser Point™ indicator, making aiming even easier. Compact, simple to use, and reliable... produced by the world leader in portable IR thermometers. When it comes to ensuring food quality and safety, let the MiniTempFS work for you.

- Instantly and safely survey food and equipment
- HACCP monitoring tool
- Used by Health & Safety Inspectors Worldwide
- High accuracy in the HACCP Danger Zone (40-140°F)
- Eliminates cross-contamination
- Pre-set 0.97 emissivity for accurate food measurements
- Instant readings
- Simple to use
- Laser Point™



Raytek[®]



MINITEMPFS Specs and Features


Temperature range	-30 to 200°C (-25 to 400°F)
Accuracy	Between 0 to 65°C (32 to 150°F): ±1°C (±2°F)
(Assumes ambient operating temperature of 23°C [73°F])	Below 0°C (32°F): ±1°C (±2°F) ±0.1 degree/degree Above 65°C (150°F): ±1.5% of reading
Repeatability	within accuracy specifications of the unit
Response time	500 mSec, 95% of reading
Spectral response	8–14 μm
Emissivity*	pre-set 0.97
Ambient operating range	0 to 50°C (32 to 120°F)
Relative humidity	10–90% RH noncondensing, @ up to 30°C (86°F)
Storage temperature	-20° to 65°C (-4° to 150°F) without battery
Weight / Dimensions (with battery)	164 g (6 oz); 152 x 101 x 38 mm (6 x 4 x 1.5 in)
Power	9V Alkaline or NiCd battery (included)
Battery life (Alkaline)	12 hrs
Laser (Class II)	Single Laser Point
Typical Working Range	Up to 60cm (24 in)
Distance to Spot Size	4:1 95% energy
Display Hold (7 seconds)	✓
LCD Backlit Display	✓
Temperature Display	°C or °F selectable
Display Resolution	0.2°C (0.5°F)
Options/Accessories	Nylon Holster with wrist strap

Not intended to measure human temperature.

Do not point laser directly at eye or indirectly off reflective surfaces.


*For more details, visit <http://www.raytek.com/emissivity.htm>

Optical Resolution

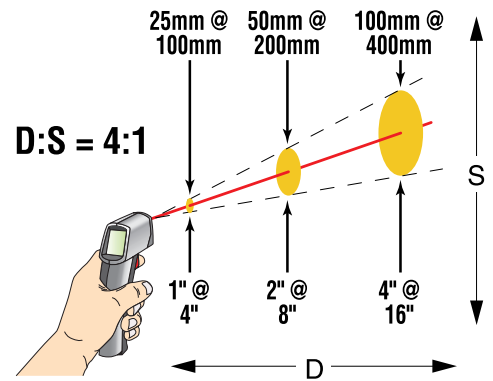

The MiniTempFS is intended for close range, within two feet of the target. The measurement area will be approximately the distance divided by four.

Laser Sighting



Laser Point™
Single-point laser indicates the approximate center of the target spot.

Emissivity

The MiniTempFS is pre-set to 0.97 emissivity, for best readings of most food products and cooking conditions.

Worldwide Headquarters

Raytek Corporation
1201 Shaffer Rd. PO Box 1820
Santa Cruz, CA 95061-1820 USA
Tel: 1 800 866 5478
1 831 458 1110
Fax: 1 831 425 4561
solutions@raytek.com

Raytek de Mexico, S.A. de C.V.
Puebla, Pue. Mexico
Tel: 52 222 230 4380
Fax: 52 222 230 4438
ventas@raytek.com.mx

Raytek China Company
Beijing, China
Tel: 86 10 6439 2255
Fax: 86 10 6437 0285
info@raytek.com.cn

Raytek Japan, Inc.
Osaka, Japan
Tel: 81 6 4390 5015
Fax: 81 6 4390 5016
info@raytekjapan.co.jp

South American Headquarters

Raytek do Brasil
Sorocaba, SP Brasil
Tel: 55 15 32176046
Fax: 55 15 32175694
raytek@raytek.com.br

European Headquarters

Raytek GmbH
Berlin, Germany
Tel: 49 30 4 78 00 80
Fax: 49 30 4 71 02 51
raytek@raytek.de

Raytek UK Ltd.
Milton Keynes, United Kingdom
Tel: 44 1908 630800
Fax: 44 1908 630900
ukinfo@raytek.com

Raytek France
Palaiseau, France
Tel: 33 1 64 53 15 40
Fax: 33 1 64 53 15 44
info@raytek.fr



© 2003 Raytek GmbH (56008/Rev. B) 06/2003
Raytek, the Raytek logo, MiniTemp and the MiniTemp logo are registered trademarks, and Laser Point is a trademark of Raytek Corporation. Specifications subject to change without notice. Raytek is ISO 9001:2000 certified.

www.raytek.com

for up-to-the-minute features

Raytek®